


# HEAD LOSS CHARACTERISTICS FOR DOUBLE DOOR CHECK VALVE

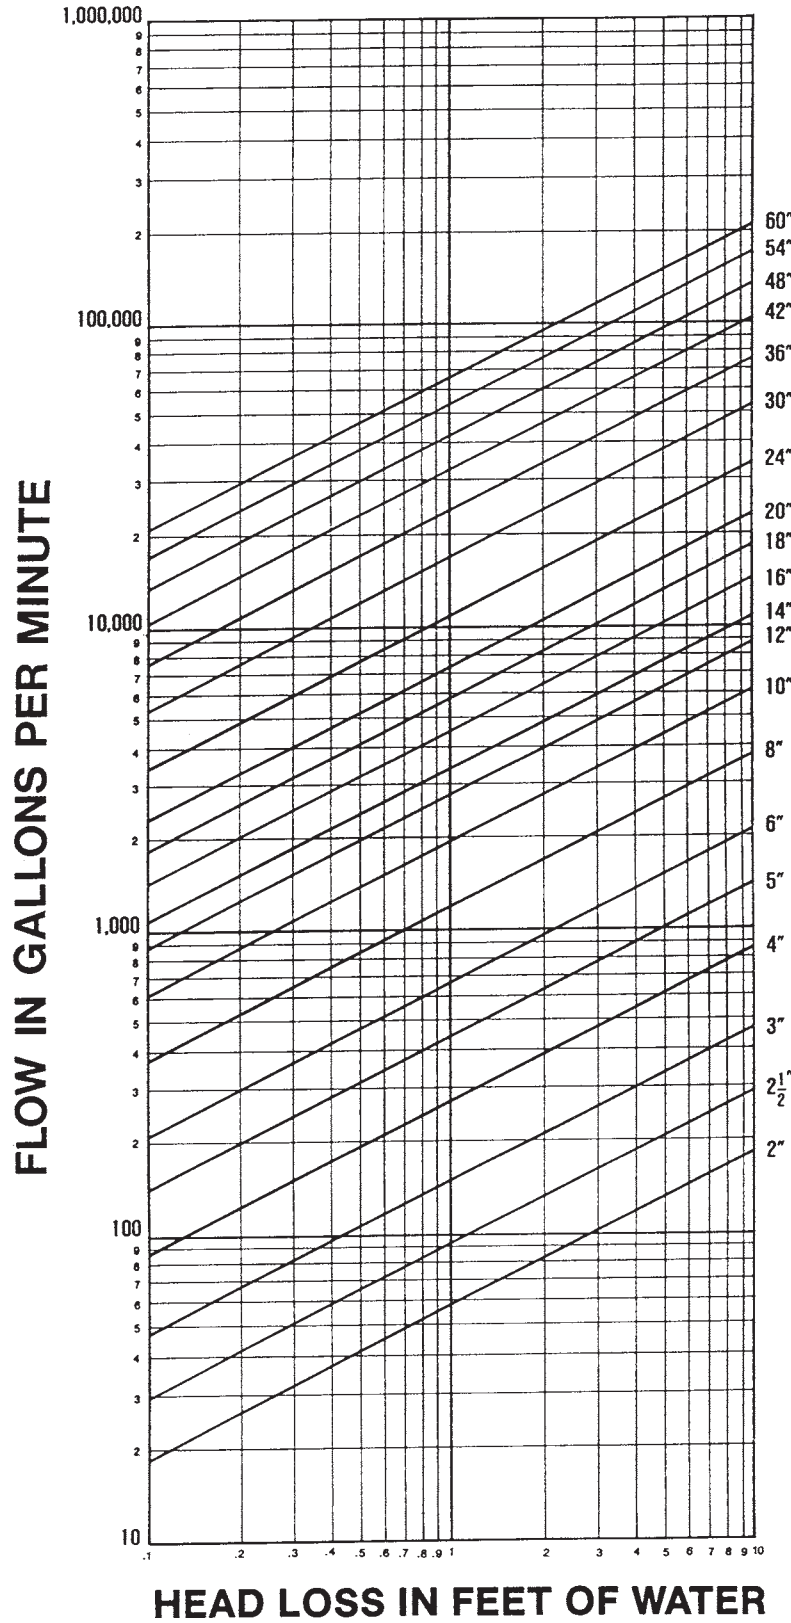

## CERTIFIED FLOW TESTED

FIGURES SHOWN ARE BASED ON CERTIFIED FLOW TESTS CONDUCTED AT UTAH STATE UNIVERSITY, WATER RESEARCH LABORATORY, REPORT NO. 299. VALVES SIZES 8" & 14". ACTUAL FIELD CONDITIONS MAY VARY FROM THESE CURVES.  
NOTE: WHEN COMPARING SIMILAR COMPETITORS PUBLISHED DATA, ONLY USE CERTIFIED FLOW TEST DATA.

DATE  
09-01-03



DRWG. NO.  
C-9000

SPECIFICATIONS OTHER SIDE